

STREET MP

Fixtures for street and square lighting

IP65 | 125 lm/W



LU060MP 60W 7500lm

60W IP65 CRI(RA) >72 lumen 7500 5700 Kelvin 100-254V 50Hz 130x60°



LU080MP 80W 10000lm

80W IP65 CRI(RA) >72 lumen 10000 5700 Kelvin 100-254V 50Hz 130x60°

LU100MP 100W 12500lm

100W IP65 CRI(RA) >72 lumen 12500 5700 Kelvin 100-254V 50Hz 130x60°



LU120MP 120W 15000lm

120W IP65 CRI(RA) >72 lumen 15000 5700 Kelvin 100-254V 50Hz 130x60°

LU150MP 150W 18750lm

150W IP65 CRI(RA) >72 lumen 18750 5700 Kelvin 100-254V 50Hz 130x60°



LU180MP 180W 22500lm

180W IP65 CRI(RA) >72 lumen 22500 5700 Kelvin 100-254V 50Hz 130x60°

LU200MP 200W 25000lm

200W IP65 CRI(RA) >72 lumen 25000 5700 Kelvin 100-254V 50Hz 130x60°



50 000 h

> 50 000

100% E (<1s)



ENERGY LABEL A+ 80 kWh/1000h

ENERGY LABEL A+ 120 kWh/1000h

ENERGY LABEL A+ 180 kWh/1000h

Q	WATT	IP	Lumen	Beam	Volt	Color	CRI	cosφ Power Factor	EAN	EEI	mounting hole	Dimensions
LU060MP	60W	65	7500lm	130°x60°	100V-254V	5700K	>72	>0,9	---	A+	ø 50 mm	590x280x190 mm
LU080MP	80W	65	10000lm	130°x60°	100V-254V	5700K	>72	>0,9	---	A+	ø 50 mm	690x345x210 mm
LU100MP	100W	65	12500lm	130°x60°	100V-254V	5700K	>72	>0,9	---	A+	ø 50 mm	690x345x210 mm
LU120MP	120W	65	15000lm	130°x60°	100V-254V	5700K	>72	>0,9	---	A+	ø 65 mm	810x400x230 mm
LU150MP	150W	65	18750lm	130°x60°	100V-254V	5700K	>72	>0,9	---	A+	ø 65 mm	810x400x230 mm
LU180MP	180W	65	22500lm	130°x60°	100V-254V	5700K	>72	>0,9	---	A+	ø 70 mm	950x470x240 mm
LU200MP	200W	65	25000lm	130°x60°	100V-254V	5700K	>72	>0,9	---	A+	ø 70 mm	950x470x240 mm

STREET MP

Тип светодиод: Philips. Драйвер Meanwell.

Осветителните тела LED Street MP са много професионална конструкция, оборудвана с най-висококачествени компоненти. Удълженият гаранционен срок го предразполага към най-взискателните проекти. LED технологията предлага не само висока светлинна ефективност, но и бяла светлина, която перфектно отразява цветовете и в сравнение с натриевите лампи подобрява изгледа с детайли през нощта. Друго предимство на LED осветителните тела е незабавното включване, благодарение на което те си сътрудничат добре с контролните системи. Уличната лампа работи чудесно както на улицата, така и на площада или зоната за паркиране.

Предимства:

Висока светлинна ефективност дори до 50% икономия на енергия *
Защита от отблясъци - много важен фактор при проектирането на улици.
Маркови чипове на Philips - гаранция за висока производителност и дълготрайност. Възможността за използване на интегриран детектор за дневна светлина.

Характеристики:

Шофьор с марка от висок клас.
Високо качество. Дълъг живот.
Широката работна температура варира от -40 °C до 50 °C

Приложения:

Улици, зони за паркиране, площи, кръстовища.

LED Philips chips. Meanwell driver

LED Street MP luminaires are very professional construction equipped with the highest quality components. The extended warranty period predisposes it to the most demanding projects. LED technology offers not only high luminous efficacy but also white light, which perfectly reflects colors and, compared to sodium lamps, improves the detail view at night. Another advantage of LED luminaires is immediate switched on thanks to which they cooperate well with control systems. Street lamp works great both on the street and in the square or parking area.

Advantages:


High luminous efficiency even up to 50% energy savings *
Glare effect protection - a very important factor in streets designing.
Branded Philips chips - a guarantee of high performance and lifespan.
The possibility of using an integrated daylight detector.

Characteristics:

A high-class branded driver.
High quality. Long lifespan.
Wide operating temperature ranges from -40 °C to 50 °C

Applications:

Streets, parking areas, squares, intersections.

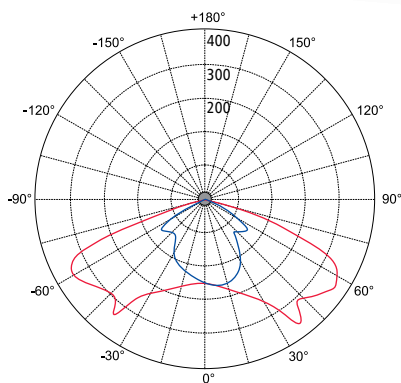

CO-180 —
C90-270 —

